

A photograph of a data center aisle with server racks. The scene is dimly lit with a blue and purple color palette. Several glowing, semi-transparent rectangular outlines in shades of blue and purple are overlaid on the image, highlighting specific areas of the server racks and the aisle. The outlines vary in size and position, some appearing as simple rectangles and others as more complex shapes.


# Data Center Storage Solutions

## Powering the Data Revolution



For more than 50 years, Western Digital® has been enabling data at scale. Our data center SSDs, HDDs, fabric bridges, and platforms enable our customers to gain and leverage insights that they can extract from the zettabytes of data being generated by smart factories, connected endpoints, autonomous vehicles, IoT devices and more. Our robust portfolio and our outstanding customer service help companies and individuals transform their businesses with data.

# Essential Data Infrastructure for the Zettabyte Age




## Ultrastar® Data Center SSDs

- Portfolio breadth and depth for cloud computing to high-performance servers
- Industry-leading NAND
- Vertically integrated controllers and firmware




## Ultrastar Data Center HDDs

- 1st with OptiNAND™-enabled 26TB CMR & 32TB SMR HDDs
- 1st with Energy-Assisted Magnetic Recording technology
- 1st with Triple Stage Actuator
- 1st with helium-filled HDDs
- 1st with 12TB air-filled HDDs
- 1st commercially available 11 disk HDDs



## Ultrastar and OpenFlex™ Platforms

- High-capacity disk storage platforms
- High-performance flash storage platforms
- Innovative ArcticFlow™ & IsoVibe™ technologies
- Open Composable Infrastructure Solutions



## RapidFlex™

- High-performance Fabric Bridge Device
- Server and JBOF applications
- TCP and RoCE Offload
- Supported by Open Composable Infrastructure

# Trusted Storage Delivering Innovation Across All Technologies



## NVMe™ SSDs

Low-latency, high-performance NVMe SSDs to accelerate your data center workloads



## Helium-filled HDDs

Highest capacity HDDs for data center expansion and cost-efficient scale



## Air-filled HDDs

Economical and reliable data access for traditional data center application



## Platforms


Complete portfolio of storage and server platforms for SATA, SAS, NVMe and NVMe-oF™





## Fabric Bridges

Enable NVMe over fabrics (NVMe-oF) attached storage systems using fabric bridge devices and adapters

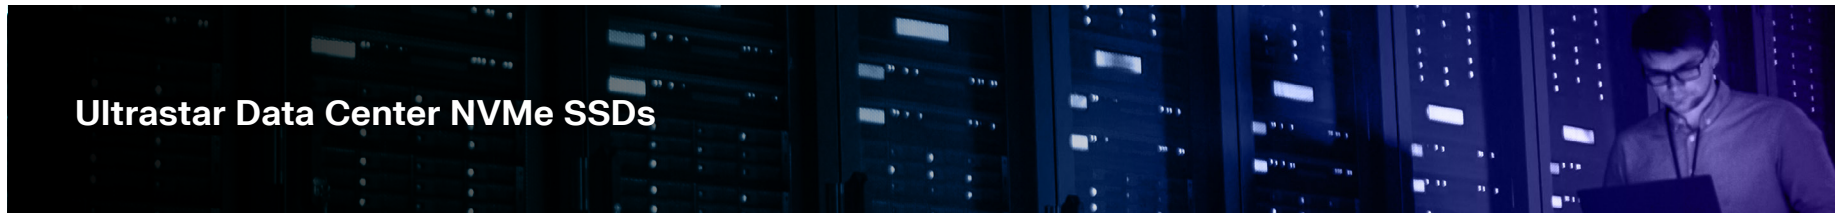



# Ultrastar Data Center NVMe SSDs

	Performance NVMe	Mainstream NVMe
	 <p><b>Ultrastar DC SN655</b></p>	 <p><b>Ultrastar DC SN650</b></p>
Interface	PCIe Gen4 1x4, 2x2, NVMe 1.4	PCIe Gen4 1x4, NVMe 1.4
Form Factor	U.3, 15mm	U.3, 15mm
Capacity (TB) <sup>1</sup> / Endurance <sup>2</sup>	3.84, 7.68, 15.36, 30.72, 61.44 / 1 DW/D	7.68, 15.36 / 1 DW/D
NAND	3D TLC	
Seq R/W (MB/s), up to <sup>3</sup>	6,800/3,700	6,600/2,800
Random R/W (KIOPS), up to	1,100/125	970/109
Reliability <sup>4</sup>	Unrecoverable Bit Error Rate (UBER): 1 in 10 <sup>17</sup> MTBF (M hours): 2.5 AFR: 0.35%	Unrecoverable Bit Error Rate (UBER): 1 in 10 <sup>17</sup> MTBF (M hours): 2 AFR: 0.44%
Security	SE, ISE, TCG Ruby	SE, ISE





# Ultrastar Data Center HDDs

## High-Capacity Helium CMR Hard Drives



**Ultrastar  
DC HC590**



**Ultrastar  
DC HC580**







**Ultrastar  
DC HC570**





	Ultrastar DC HC590	Ultrastar DC HC580	Ultrastar DC HC570
Interface	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s
Rotational speed (RPM)	7200		
Form Factor	3.5-inch data center HDD		
Capacity (TB) <sup>1</sup>	24, 26	24	22, 24
Format	512e/4Kn: 4096	512e/4Kn: 4096	512e/4Kn
Sustained transfer rate (MB/s, max/min) <sup>4</sup>	298/284	298/284	291/277
Idle_A (W), SATA/SAS <sup>6</sup>	5.5/5.8	5.5	5.7/6.0
ArmorCache™	Yes		
Reliability <sup>7</sup>	MTBF (M hours): 2.5 / AFR: 0.35% / Workloads: up to 550TB/year		
Security	Base (SE), SED, SED-FIPS		



# Ultrastar Data Center HDDs

	High-Capacity Helium SMR Hard Drives		
	  <b>Ultrastar DC HC690</b>	 <b>Ultrastar DC HC680</b>	 <b>Ultrastar DC HC670</b>
Interface	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s
Rotational speed (RPM)	7200		
Form Factor	3.5-inch data center HDD		
Capacity (TB) <sup>1</sup>	30, 32	26, 27, 28	26
Format	512e/4Kn	512e/4Kn	512e/4Kn
Sustained transfer rate (MB/s, max/min) <sup>4</sup>	269/25	265/253	298/284
Idle_A (W), SATA/SAS <sup>6</sup>	2.8/3.2	5.5	265/253
ArmorCache™	Yes		
Reliability <sup>7</sup>	MTBF (M hours): 2.5 AFR: 0.35% Workloads: up to 550TB/year		
Security	Base (SE), SED, SED-FIPS		




	Mid-Capacity Helium CMR Hard Drives			
	 <b>Ultrastar DC HC560</b>	 <b>Ultrastar DC HC555</b>	 <b>Ultrastar DC HC550</b>	 <b>Ultrastar DC HC520</b>
Interface	SATA 6Gb/s, SAS 12Gb/s			
Rotational speed (RPM)	7200			
Form Factor	3.5-inch data center HDD			
Capacity (TB) <sup>1</sup>	20	12, 14, 16, 18, 20	14, 16, 18	12
Format	512e			
Sustained transfer rate (MB/s, max) <sup>5</sup>	291	269	269 (18TB) 262 (16TB)	243
Idle_A (W), SATA/SAS <sup>6</sup>	6.1/5.8	5.3/5.7	5.6/5.8	5.0/6.1
ArmorCache™	Yes			
Reliability <sup>7</sup>	MTBF (M hours): 2.5 AFR: 0.35% Workloads: up to 550TB/year			
Security	Base (SE), SED, SED-FIPS			





# Ultrastar Data Center HDDs

## Low-Capacity Air-filled CMR Hard Drives



**Ultrastar  
DC HA340**



**Ultrastar  
DC HC330**



**Ultrastar  
DC HC320**



**Ultrastar  
DC HC310**



**Ultrastar  
DC HA210**

	Ultrastar DC HA340	Ultrastar DC HC330	Ultrastar DC HC320	Ultrastar DC HC310	Ultrastar DC HA210
Interface	SATA 6Gb/s		SATA 6Gb/s, SAS 12Gb/s		SATA 6Gb/s
Rotational speed (RPM)			7200		
Form Factor			3.5-inch data center HDD		
Capacity (TB) <sup>1</sup>	4, 6, 8, 10, 12	10	8	4, 6	1, 2
Format	512e	512e	512e	512n available on 4TB capacity	512n
Sustained transfer rate (MB/s, max)	267	262	255	255 233 w/512n	200 (2TB) 184 (1TB)
Idle (W), SATA/SAS	5.8/8.4	8.0/9.0	7.4/8.4	5.9/7.0	5.9/NA
Reliability			MTBF (M hours): 2 AFR: 0.44% Workloads: up to 550TB/year		
Security		Base (SE), SED, SED-FIPS			SE



**Ultrastar Data Center Platforms**

**Hybrid Storage Platforms**



**Ultrastar Data60**




**Ultrastar Data60 3000**

Storage Type	HDD	
Interface	SATA/SAS	
# Drives (up to)	60	60
Maximum Capacity (PB) <sup>1</sup>	1.68	1.68
Dimension	4U	
Features	IsoVibe ArcticFlow	

# Ultrastar Data Center Platforms

## Hybrid Storage Platforms



**Ultrastar Data102**

Storage Type	HDD
Interface	SATA/SAS
# Drives (up to)	102
Maximum Capacity (PB) <sup>1</sup>	2.85
Dimension	4U
Features	IsoVibe ArcticFlow



# OpenFlex Data Center Platforms

## NVMe-oF Storage Platforms



OpenFlex Data24

OpenFlex Data24 3200

OpenFlex Data24 4000 Series

	OpenFlex Data24	OpenFlex Data24 3200	OpenFlex Data24 4000 Series
Storage Type	SSD	SSD	SSD
Interface	NVMe (NVMe-oF) 2, 4, or 6 NICs	NVMe (NVMe-oF) 6 RapidFlex C2000s	NVMe (NVMe-oF) 6 RapidFlex A2000s
Connection Type	RoCE	RoCE or TCP	RoCE or TCP
# Drives (up to)	24	24	24
Maximum Capacity (TB) <sup>1</sup>	368	368	368
Dimension	2U	2U	2U



# Ultrastar Transporters

## Data Transport Servers






**Ultrastar Transporter**

Device Type	Data Transporter and Edge Storage
Maximum Storage	24 Ultrastar DC SN650 NVMe SSDs 15.36TB per SSD, 1 DW/D, ISE (Instant Secure Erase)
Network Interface	Dual Port 200GbE QSFP112
Memory	128GiB DDR4 ECC DRAM
Display	Six-button, LCD/Character
Management	IPMI 2.0 system management Dual 10GBase-T RJ-45



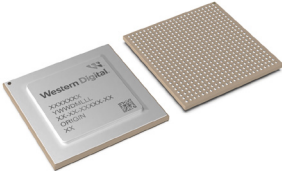

# RapidFlex Data Center Fabric Bridge

	NVMe-oF Controllers		
			
	<b>RapidFlex A2000</b>	<b>RapidFlex C2000</b>	<b>RapidFlex C2110</b>
<b>Device Type</b>	ASIC Fabric Bridge Device	Half-height / half-length NVMe Adapter	SFF-TA-1008 to SFF-8639 Interposer
<b>Network Interface</b>		vDual Ports 100 / 50 / 25 GbE	
<b>PCIe Interface</b>	PCIe Gen 4 x 16 lanes	PCIe Gen 4 x 16 lanes	PCIe Gen 4 x 4 lanes
<b>NVMe Capability</b>		NVMe 1.4 Compatible NVMe-oF 1.1 Compatible TCP and RoCEv2	
<b>Dimension</b>	25mm BGA	129.41mm x 68.95mm	68.8mm x 68.6mm
<b>Features</b>	Bridges NVMe to NVMe-oF running on Ethernet Fabrics Enables Composable Disaggregated Infrastructure (CDI)		

<sup>1</sup> One gigabyte (GB) is equal to 1,000MB (one billion bytes) and one terabyte (TB) is equal to 1,000GB (one trillion bytes) and one petabyte (PB) is equal to 1,000 TB. Actual capacity may be less due to operating environment.

<sup>2</sup> Endurance rating based on DW/D using 4KiB 100% random write and JESD 219 workloads over 5 years.

<sup>3</sup> Based on internal testing. Performance will vary by capacity point, changes in useable capacity, or security option. Consult product manual for further details. All performance measurements are in full sustained mode and are peak values. Subject to change.

<sup>4</sup> MTBF and AFR specifications are based on a sample population and are estimated by statistical measurements and acceleration algorithms under typical operating conditions for this drive model. MTBF and AFR ratings do not predict an individual drive's reliability and do not constitute a warranty.

<sup>5</sup> Idle specification is based on use of Idle\_A

<sup>6</sup> Based on internal testing; performance may vary depending on host environment, drive capacity, logical block address (LBA), and other factors. 1MiB = 1,048,576 bytes (2<sup>20</sup>), 1MB = 1,000,000 bytes (10<sup>6</sup>)

<sup>7</sup> Final MTBF and AFR specifications will be based on a sample population and are estimated by statistical measurements and acceleration algorithms under typical operating conditions, typical workload and 40°C device-reported temperature. Derating of MTBF and AFR will occur above these parameters, up to 550TB/year and 60°C (device reported temperature). MTBF and AFR ratings do not predict an individual drive's reliability and do not constitute a warranty.



©2024 Western Digital Corporation or its affiliates. All rights reserved. Western Digital, the Western Digital logo, ArmorCache, ArtioFlow, HelioSeal, IsoVibe, OpenFlex, RapidFlex, and UltraStar are registered trademarks or trademarks of Western Digital Corporation or its affiliates in the US and/or other countries. The NVMe and NVMe-oF word marks are trademarks of NVM Express, Inc. References in this publication to Western Digital products, programs, or services do not imply that they will be made available in all countries. Product specifications provided are sample specifications that are subject to change and do not constitute a warranty. Pictures shown may vary from actual products. All other marks are the property of their respective owners.

5601 Great Oaks Parkway  
San Jose, CA 95119, USA  
[www.westerndigital.com/support](http://www.westerndigital.com/support)