

Veritas NetBackup™ 5330 Appliance Product Description

Veritas NetBackup™ 5330 Appliance Product Description

Last updated: 2021-11-09

Legal Notice

Copyright © 2018 Veritas Technologies LLC. All rights reserved.

Veritas, the Veritas Logo, and NetBackup are trademarks or registered trademarks of Veritas Technologies LLC or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

This product may contain third party software for which Veritas is required to provide attribution to the third party ("Third Party Programs"). Some of the Third Party Programs are available under open source or free software licenses. The License Agreement accompanying the Software does not alter any rights or obligations you may have under those open source or free software licenses. Refer to the third party legal notices document accompanying this Veritas product or available at:

<https://www.veritas.com/about/legal/license-agreements>

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Veritas Technologies LLC and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. VERITAS TECHNOLOGIES LLC SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, et seq. "Commercial Computer Software and Commercial Computer Software Documentation," as applicable, and any successor regulations, whether delivered by Veritas as on premises or hosted services. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Veritas Technologies LLC
500 E Middlefield Road
Mountain View, CA 94043

<http://www.veritas.com>

Technical Support

Technical Support maintains support centers globally. All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policies. For information about our support offerings and how to contact Technical Support, visit our website:

<https://www.veritas.com/support>

You can manage your Veritas account information at the following URL:

<https://my.veritas.com>

If you have questions regarding an existing support agreement, please email the support agreement administration team for your region as follows:

Worldwide (except Japan)

CustomerCare@veritas.com

Japan

CustomerCare_Japan@veritas.com

Documentation

The latest documentation is available on the Veritas website:

<https://sort.veritas.com/documents>

Documentation feedback

Your feedback is important to us. Suggest improvements or report errors or omissions to the documentation. Include the document title, document version, chapter title, and section title of the text on which you are reporting. Send feedback to:

APPL.docs@veritas.com

You can also see documentation information or ask a question on the Veritas community site:

<http://www.veritas.com/community/>

Veritas Services and Operations Readiness Tools (SORT)

Veritas Services and Operations Readiness Tools (SORT) is a website that provides information and tools to automate and simplify certain time-consuming administrative tasks. Depending on the product, SORT helps you prepare for installations and upgrades, identify risks in your datacenters, and improve operational efficiency. To see what services and tools SORT provides for your product, see the data sheet:

https://sort.veritas.com/data/support/SORT_Data_Sheet.pdf

Contents

Chapter 1	NetBackup 5330 Appliance overview	6
	About the NetBackup 5330 Appliance	7
	NetBackup 5330 Appliance system features	8
	Serial number locations	10
	NetBackup 5330 Appliance compute node disk drive configurations	11
	NetBackup 5330 Appliance compute node control panel information	13
	About the NetBackup 5330 Appliance compute node rear panel	14
	NetBackup 5330 Appliance compute node PCIe slot I/O configuration options	16
	NetBackup 5330 Appliance compute node Ethernet port configurations	18
	Dual-port 10 Gb Ethernet card with SFP+ transceiver ports	19
	Dual-port 8 Gb Fibre Channel Host Bus Adapter (FC HBA) specifications	20
	About NetBackup 5330 Appliance storage shelves	21
	Available appliance storage options	21
	About the NetBackup 5330 Appliance Primary Storage Shelf and Expansion Storage Shelf front panel	22
	About the NetBackup 5330 Appliance Primary Storage Shelf and Expansion Storage Shelf rear panels	24
	Best practices for rack installation	30
Chapter 2	NetBackup 5330 Appliance cables	32
	Power cables	32
	Network cable	33
	Multi-Mode fiber optic cable	34
Appendix A	Technical specifications, standards, and compliance information	36
	NetBackup 5330 Appliance system technical specifications	36
	Environmental specifications	40


Protocol standards	41
Regulatory, compliance, and certification information	41
Index	42

NetBackup 5330 Appliance overview

This chapter includes the following topics:

- [About the NetBackup 5330 Appliance](#)
- [NetBackup 5330 Appliance system features](#)
- [About NetBackup 5330 Appliance storage shelves](#)
- [Best practices for rack installation](#)

About the NetBackup 5330 Appliance

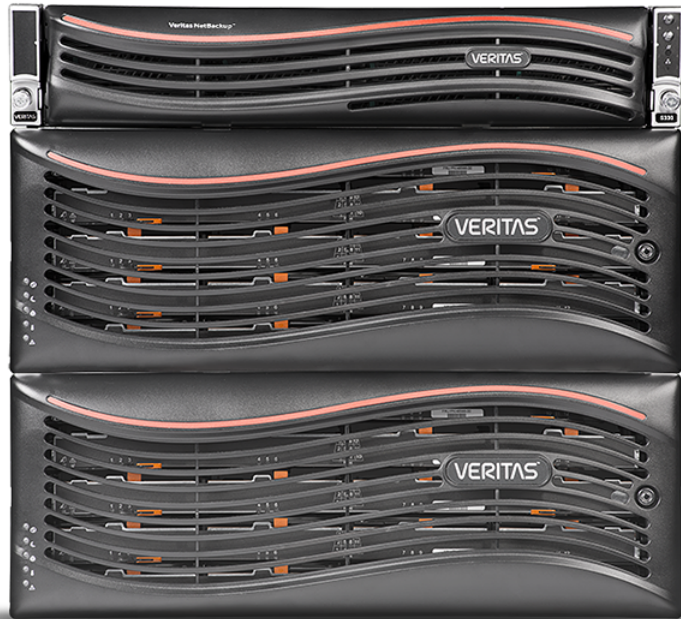

The NetBackup 5330 Appliance is a hardware and software storage system that scales to a total of 687 TB of available backup capacity. It consists of a 2U NetBackup 5330 Appliance compute node and one externally attached 4U Primary Storage Shelf. You can add up to two optional 4U Expansion Storage Shelves if you require additional storage.

Fibre channel (FC) cables connect the NetBackup 5330 Appliance compute node to the Primary Storage Shelf. SAS cables connect the Primary Storage Shelf to the Expansion Storage Shelf.

See “[NetBackup 5330 Appliance system features](#)” on page 8.

NetBackup 5330 Appliance system features

Table 1-1 NetBackup 5330 Appliance system features

Feature	Description
Performance	<p>Processors</p> <ul style="list-style-type: none"> ■ Two Intel Xeon 10 core 2.80GHz E5-2680 v2 CPUs or Two Intel Xeon 10 core 3.00GHz E5-2690 v2 CPUs ■ Supports high-performance processors with low-power consumption. ■ Provides high-capacity intra-appliance switching bandwidth, along with high I/O throughput. ■ Available storage capacity can be any combination of up to 229 TB. The available capacity can be allocated either in part or in whole to a deduplication pool or to an AdvancedDisk pool (non-deduplicated storage).
System memory configuration (DIMMs)	16 GB x 24; total RAM: 384 GB
RAID cache	24 GB
Space reduction	The deduplication engine provides up to 100 times reduction in storage. The client-side plug-in provides similar levels of bandwidth reduction.
Scalable architecture	<p>Due to fingerprinting and RAID redundancy, the overall storage capabilities are not a simple multiplication of the disk size and the total number of disks.</p> <p>The NetBackup 5330 Appliance consists of a compute node and one Primary Storage Shelf. You can add additional storage to the system by adding up to two Expansion Storage Shelves. Depending on the storage option you purchase, a NetBackup 5330 Appliance system can provide up to 687 TBs of available storage capacity.</p> <p>See “Available appliance storage options” on page 21.</p>
High availability	Supports redundant hot-swappable disks and power modules.

Table 1-1 NetBackup 5330 Appliance system features (*continued*)

Feature	Description
Easy management	<p>Provides separate out-of-band management network interfaces. You can remotely turn on, turn off, and reset appliances through the network.</p> <p>Supports the SNMP traps and automatically reports alarms.</p> <p>Reports disk information through the out-of-band management channel.</p>
RAID levels	<p>RAID1 (striping and mirroring) and RAID6 (block level striping with double distributed parity) are used as follows:</p> <ul style="list-style-type: none"> ■ NetBackup 5330 compute node system disks: RAID1 ■ Storage shelf data storage disks: RAID6
Fibre Channel support	<p>The NetBackup 5330 compute node can be ordered with two, three, five, or six Fibre Channel (FC) HBA cards already installed. Each card includes two standard Fibre Channel ports. If less than six FC HBA cards are ordered, a 10 Gb Ethernet card with two standard ports can be ordered. The compute node uses the QLE2562, a QLogic 8 Gb FC PCIe dual port adapter.</p>
Rear panel ports	<p>One 1 Gb/s IPMI remote network port</p> <p>One VGA port</p> <p>Four 1 GbE network ports, with an RJ-45 connector, and link and activity LEDs. Two of the ports are reserved for private networks.</p> <p>Two 10 GbE network ports, with Small Form-factor Pluggable (SFP) modules, and link and activity LEDs.</p> <p>See “About the NetBackup 5330 Appliance compute node rear panel” on page 14.</p>

See [“NetBackup 5330 Appliance compute node disk drive configurations”](#) on page 11.

See [“NetBackup 5330 Appliance compute node disk drive LED descriptions”](#) on page 12.

See [“NetBackup 5330 Appliance compute node control panel information”](#) on page 13.

See [“About the NetBackup 5330 Appliance compute node rear panel”](#) on page 14.


See [“NetBackup 5330 Appliance compute node PCIe slot I/O configuration options”](#) on page 16.

See [“NetBackup 5330 Appliance compute node Ethernet port configurations”](#) on page 18.

See [“Dual-port 8 Gb Fibre Channel Host Bus Adapter \(FC HBA\) specifications”](#) on page 20.

Serial number locations

A vertical bar on the rear panel of the compute node contains the serial number.

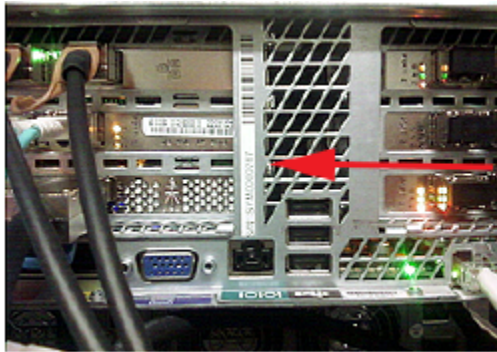

The serial number of the storage shelves is located in two places.

- The front of the shelf contains the serial number, on the lower right-hand corner.



- The top of the storage shelf includes the serial number label, near the rear of the unit. The number is outlined in red.



NetBackup 5330 Appliance compute node disk drive configurations

The NetBackup 5330 Appliance compute node contains eight 3TB SAS disk drives. Two of the 3 TB disk drives include two operating system disks, one each in slot 0 and slot 1. These two disk drives comprise Volume 0, which is a RAID 1 volume. Volume 0 contains both the operating system and the NetBackup application.

Slot 2 contains a hot spare disk drive. Slot 3 and slot 4 comprise Volume 1, which is a RAID 1 volume that contains the swap file system for the operating system. Slot 5 contains another hot spare disk drive. Both of the hot spares can be used by either volume. The remaining slots contain blank carriers.

The disks in slots 6 and 7 are reserved for future use.

Figure 1-1 NetBackup 5330 Appliance compute node front panel disk slot assignments



NetBackup 5330 Appliance compute node disk slot assignments and RAID disk assignments:

- Slot 0 - Disk0 of RAID1, Volume 0 (set as the Boot volume and contains the operating system)
- Slot 1 - Disk1 of RAID1, Volume 0 (set as the Boot volume and contains the operating system)
- Slot 2 - Hot spare disk
- Slot 3 - Disk0 of RAID1, Volume 1 (contains the swap file for the operating system, along with log files)

- Slot 4 - Disk1 of RAID1, Volume 1 (contains the swap file for the operating system, along with log files)
- Slot 5 - Hot spare disk
- Slot 6 - The disk drive in slot 6 is reserved for future use.
- Slot 7 - The disk drive in slot 7 is reserved for future use.

Note: Slots 6, 7, 8, 9, 10, and 11 are intentionally empty for compute node cooling purposes.

See [“NetBackup 5330 Appliance compute node disk drive LED descriptions”](#) on page 12.

NetBackup 5330 Appliance compute node disk drive LED descriptions

Each disk drive module contains two LEDs on the left-hand side of each module.

The LEDs appear as follows:

- The LED on the top is solid amber when a disk drive fault occurs. This LED is not lit when there are no disk drive faults.
- The LED on the bottom is solid green when power is supplied to the disk drive. This LED flashes green when the disk drive is active.

Note that the disk drive modules that do not contain disk drives also have LEDs. Although there is no drive activity going on, some colored lights may still be seen through the disk modules.

Figure 1-2 Disk drive module LEDs



Table 1-2 Disk drive module LED descriptions

LED color	Condition	Description/Behavior
Amber	Off	No access and no fault
Amber	On	A hard drive fault has occurred

Table 1-2 Disk drive module LED descriptions (*continued*)

LED color	Condition	Description/Behavior
Amber	Blinking	A RAID rebuild is in progress (1 Hz), Identify (2 Hz)
Green	Power on with no drive activity	LED stays on
Green	Power on with drive activity	LED blinks off when processing a command
Green	Power on and drive spun down	LED stays off
Green	Power on and drive spinning up	LED blinks

NetBackup 5330 Appliance compute node control panel information

The front panel of the NetBackup 5330 Appliance compute node includes a small panel that is attached to the right side of the device. System information is shown on this panel.

Figure 1-3 NetBackup 5330 Appliance compute node control panel

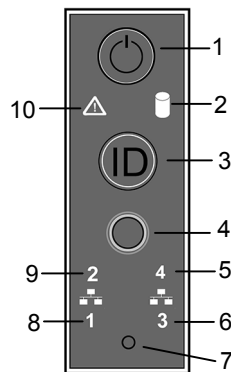


Table 1-3 LED panel descriptions

Label	Description
1	AC power button with integrated LED (executes a shutdown before turning off power)

Table 1-3 LED panel descriptions (*continued*)

Label	Description
2	Hard drive activity LED
3	ID button with integrated LED
4	Cold reset button (restarts the appliance instantly)
5	NIC4/eth3 activity LED (for public use)
6	NIC3/eth2 activity LED (for public use)
7	NMI button (recessed; a tool is required for use)
8	NIC1/eth0 activity LED (for public use)
9	NIC2/eth1 activity LED (for public use)
10	Status LED

About the NetBackup 5330 Appliance compute node rear panel

The rear panel of a NetBackup 5330 Appliance compute node has several access ports and other features, which are displayed in the following diagram and table.

Figure 1-4 NetBackup 5330 Appliance compute node rear panel access ports and features

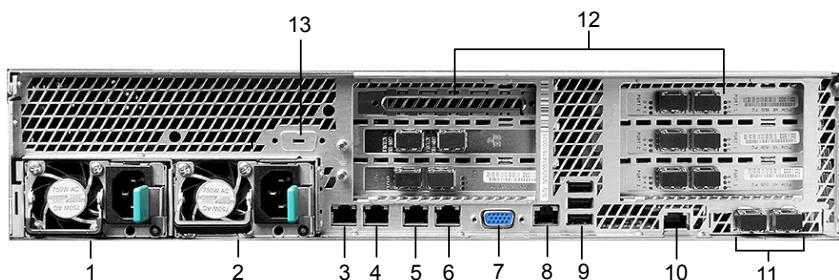


Table 1-4 NetBackup 5330 Appliance compute node port functions


Number	Function
1,2	Power Supply Modules #1, #2 (120/220VAC)

Table 1-4 NetBackup 5330 Appliance compute node port functions
(continued)

Number	Function
3,4	NIC1/eth0 and NIC2/eth1. NIC1/eth0 is reserved for use during the initial configuration of the appliance. However, after initial configuration is complete, both NIC1/eth0 and NIC2/eth1 can be used for public networks. Both are 1GB connectors
5,6	NIC3/eth2 and NIC4/eth3 - used for public networks. Both are 1GB connectors
7	DB-15 VGA connector
8	RJ45 Serial-A port (reserved)
9	USB connectors
10	A NIC port for IPMI remote management
11	NIC5/eth4 and NIC6/eth5, left to right: 10 Gb Ethernet network connectors that can be used for public networks
12	Add-in PCIe adapter slots (Fibre Channel, 1 Gb Ethernet)
13	Serial-B port (reserved)


The serial number is located on a vertical bar on the rear panel of the appliance.

Figure 1-5 Serial number location

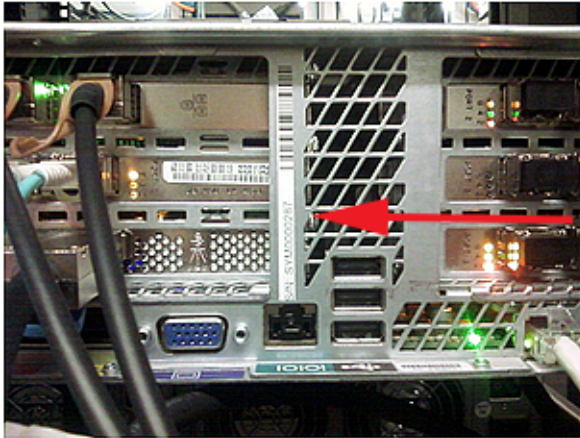

The ports on the rear panel are color-coded for easy identification.

Figure 1-6 NetBackup 5330 Appliance compute node rear port colors

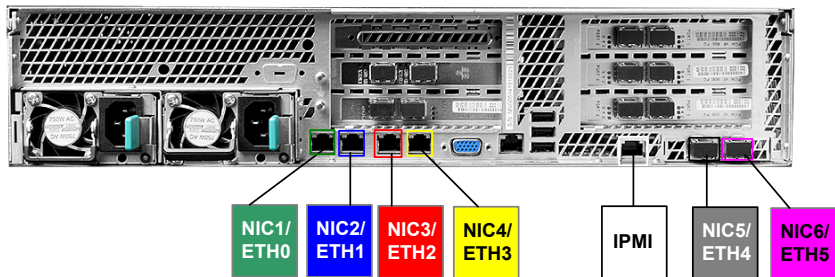


The rear panel also has two sets of low profile, full height, 3.5" form factor PCIe slots.

See [“NetBackup 5330 Appliance compute node PCIe slot I/O configuration options”](#) on page 16.

NetBackup 5330 Appliance compute node PCIe slot I/O configuration options

The rear panel of the NetBackup 5330 Appliance compute node contains six PCIe slots that are numbered 1 to 6. Slots 1, 2, and 3 are located in PCIe Riser Assembly 2. Slots 4, 5, and 6 are located in PCIe Riser Assembly 1.

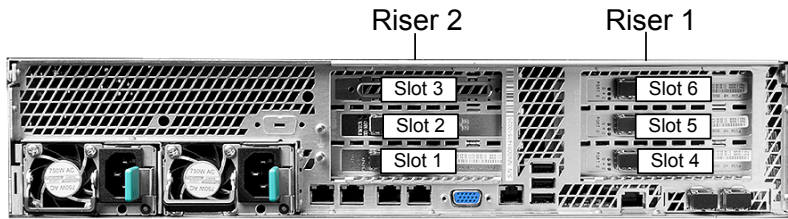

For complete information about FC HBA card usage, see the *NetBackup Appliance Fibre Channel Guide*.

[Table 1-5](#) describes the default PCIe slot I/O configuration options for the NetBackup 5330 Appliance.

Note: A NetBackup appliance high availability (HA) configuration must use two identical appliances with regard to model number and hardware configuration.

For example, use two model 5330 appliances with configuration D. You cannot use one model 5330 appliance with configuration D and one model 5340 appliance with configuration D.

This requirement applies to all of the I/O configurations for each model.

Table 1-5 Available PCIe slot I/O configuration options for the NetBackup 5330 Appliance compute node

I/O configuration option	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6
A	Primary Storage Shelf	10GbE NIC	10GbE NIC	Primary Storage Shelf	10GbE NIC	10GbE NIC
B	Primary Storage Shelf	10GbE NIC	10GbE NIC	Primary Storage Shelf	10GbE NIC	8Gb FC HBA
C	Primary Storage Shelf	10GbE NIC	10GbE NIC	Primary Storage Shelf	8Gb FC HBA	8Gb FC HBA
D	Primary Storage Shelf	8Gb FC HBA	10GbE NIC	Primary Storage Shelf	8Gb FC HBA	8Gb FC HBA

Table 1-5 Available PCIe slot I/O configuration options for the NetBackup 5330 Appliance compute node (*continued*)

I/O configuration option	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6
E	Primary Storage Shelf	8Gb FC HBA	8Gb FC HBA	Primary Storage Shelf	8Gb FC HBA	8Gb FC HBA

See “[NetBackup 5330 Appliance compute node Ethernet port configurations](#)” on page 18.


NetBackup 5330 Appliance compute node Ethernet port configurations

The NetBackup 5330 Appliance includes the following Ethernet ports, which are included along the base of the rear panel:

- 1 GbE ports: eth0, eth1, eth2, and eth3
- 10 GbE ports: eth4 and eth5

In addition, the NetBackup 5330 Appliance compute node also includes additional PCIe card-based 10 Gb Ethernet ports.

The following picture shows the location of all Ethernet ports on the rear panel of the compute node, including the PCIe card-based ports.

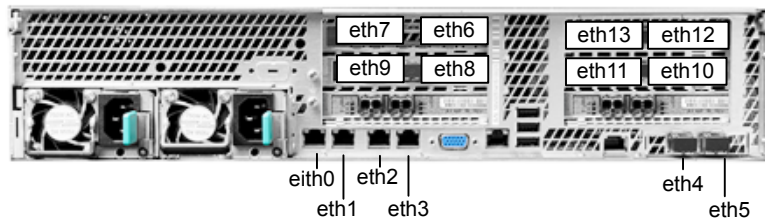

NetBackup 5330 compute node PCIe card-based 10 Gb Ethernet port designations:

- Slot 2: eth9 (left), eth8 (right)
- Slot 3: eth7 (left), eth6 (right)
- Slot 5: eth11 (left), eth10 (right)
- Slot 6: eth13 (left), eth12 (right)

See “[Dual-port 10 Gb Ethernet card with SFP+ transceiver ports](#)” on page 19.

See [“Dual-port 8 Gb Fibre Channel Host Bus Adapter \(FC HBA\) specifications”](#) on page 20.

Dual-port 10 Gb Ethernet card with SFP+ transceiver ports

The 10Gb Ethernet card with SFP+ transceivers is available with the appliance. The card can be installed in the PCI Riser Assembly in addition to Fibre Channel cards.

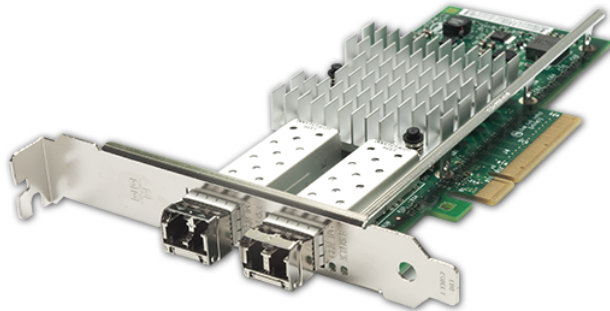


Table 1-6 Dual-port 10Gb Ethernet card specifications

Item	Specification
Dimensions	2.54 in x 6.6 in (6.4516 cm to 16.764 cm) (low-profile)
Power consumption	Typical: 7.4 watts at 0°C to 55°C (32°F to 131°F)
Operating temperature	0°C to 55°C
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Storage humidity	10% RH to 90% RH (operating, non-condensing) and 5% RH to 93% RH (non-operating, non-condensing)
System interface type	PCIe v3.0
Speed and slot width	8.0 GT/s (gigatransfers per second)
Storage over Ethernet	Fibre Channel over Ethernet (FCoE), Network File System (NFS)

Table 1-6 Dual-port 10Gb Ethernet card specifications (*continued*)

Item	Specification
Data rate supported per port	Optical: 1GbE/10GbE Direct attach: 10GbE
LED indicators	LINK (solid) and ACTIVITY (blinking) LINK SPEED (green=10Gbps; yellow=1Gbps)
Certifications	FCC B, UL, CE, VCCI, BSMI, CTICK, KCC
Air flow (minimum)	50 LFM (linear feet per minute)
Operating temperature	0 to 55 C (32 to 131 F)
Storage temperature	-40 to 70 C (-40 to 158 F)
Storage humidity	90% non-condensing relative at 35 C

See [“Dual-port 8 Gb Fibre Channel Host Bus Adapter \(FC HBA\) specifications”](#) on page 20.

See [“NetBackup 5330 Appliance compute node Ethernet port configurations”](#) on page 18.

Dual-port 8 Gb Fibre Channel Host Bus Adapter (FC HBA) specifications

The Fibre Channel (FC) host bus adapter ports are used to connect the appliance to a Primary Storage Shelf, along with clients and other devices for Fibre Transport data transfer.

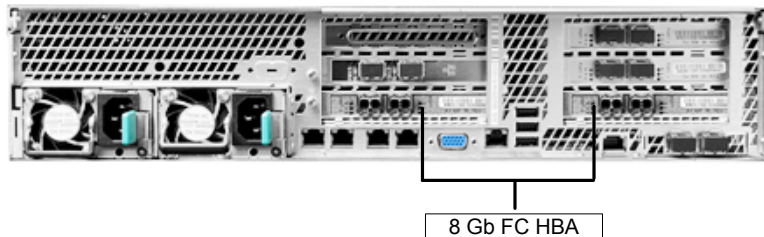


Table 1-7 Dual-port 8 Gb Fibre Channel Host Bus Adapter specifications

Item	Description
Dimensions	2.54 in x 6.6 in (6.4516 cm to 16.764 cm) (low-profile)
Power consumption	Typical: 6.2 watts at 0°C to 55°C (32°F to 131°F)
Operating temperature	0°C to 55°C
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Storage humidity	10% RH to 90% RH (operating, non-condensing) and 5% RH to 93% RH (non-operating, non-condensing)

See [“Dual-port 10 Gb Ethernet card with SFP+ transceiver ports”](#) on page 19.

See [“NetBackup 5330 Appliance compute node Ethernet port configurations”](#) on page 18.

About NetBackup 5330 Appliance storage shelves

The NetBackup 5330 Appliance storage system supports two types of externally-connected hard disk drive-based storage shelves.

These include:

- A Primary Storage Shelf (required)
- One or more Expansion Storage Shelves (optional)

The NetBackup 5330 Appliance Primary Storage Shelf and the optional NetBackup 5330 Appliance Expansion Storage Shelf each contain 60 SAS hard disk drives. Two of the disks are global hot spares, while four of the disks provide a dedicated RAID1 metadata volume group. The remaining 54 disks are used for data storage purposes. Both the Primary Storage Shelf and Expansion Storage Shelf contain five drawers, and each drawer contains 12 disk drives. The front panels of both systems are physically and functionally the same.

Depending on the storage option you purchase, a complete NetBackup 5330 Appliance system can provide up to 687 TB of available storage capacity.

Available appliance storage options

The following sections explain the storage options that are available with the different software versions of the NetBackup 5330 Appliance.

See [“How to increase the storage capacity to 687 TBs for NetBackup 5330 Appliances that run appliance software version 2.7.1, 2.7.2, or 2.7.3”](#) on page 22.

How to increase the storage capacity to 687 TBs for NetBackup 5330 Appliances that run appliance software version 2.7.1, 2.7.2, or 2.7.3

You can increase the available storage capacity of a NetBackup 5330 Appliance to 687 TBs by adding a second 229 TB Expansion Storage Shelf.

To increase the available storage capacity to 687 TBs, note the following:

- The NetBackup 5330 Appliance must have the 229 TB Primary Storage Shelf and a 229 TB Expansion Storage Shelf attached to the compute node.
- The NetBackup 5330 Appliance must run appliance software version 3.0.

To increase the available storage capacity to 687 TBs, first upgrade the NetBackup 5330 Appliance to appliance software version 3.0. Then attach the second 229 TB Expansion Storage Shelf.

For more information, see the *Veritas NetBackup Appliance Upgrade Guide - Release 3.0* and the *NetBackup 5330 Appliance Hardware Installation Guide - Release 3.0*.

About the NetBackup 5330 Appliance Primary Storage Shelf and Expansion Storage Shelf front panel


The NetBackup 5330 Appliance Primary Storage Shelf and Expansion Storage Shelf each contain 60 SAS hard disk drives. The front panel of the Primary Storage Shelf and Expansion Storage Shelf contain five drawers. The drawers are numbered one through five, beginning with the top drawer. Each storage shelf drawer contains 12 disk drives. The front panels of both systems are physically and functionally the same, as seen in the following diagram.

Figure 1-7 Primary Storage Shelf and Expansion Storage Shelf front panel



The following table shows the front panel LEDs in detail.

Figure 1-8 Disk system front panel LEDs

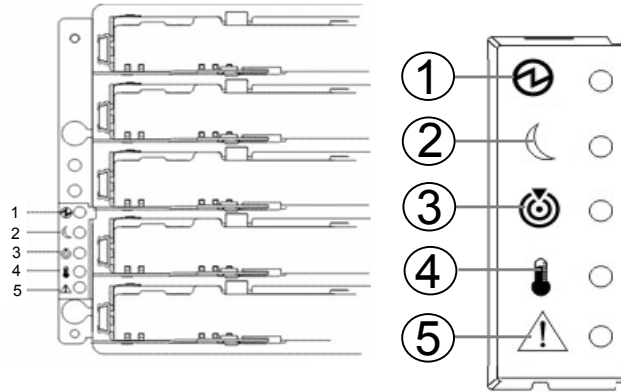


The following table describes LEDs available on the disk system front panel.

Table 1-8 Primary Storage Shelf and Expansion Storage Shelf front panel LED definitions

Number	Definition	Color
1	Power LED	Green
2	Standby Power LED	Green
3	Locate LED	White
4	Over-temperature LED	Amber
5	Service Action Required LED	Amber

As mentioned, each drawer in a storage shelf contains slots for 12 disks. The slots are numbered as shown in the following diagram.

Figure 1-9 Drawer disk layout

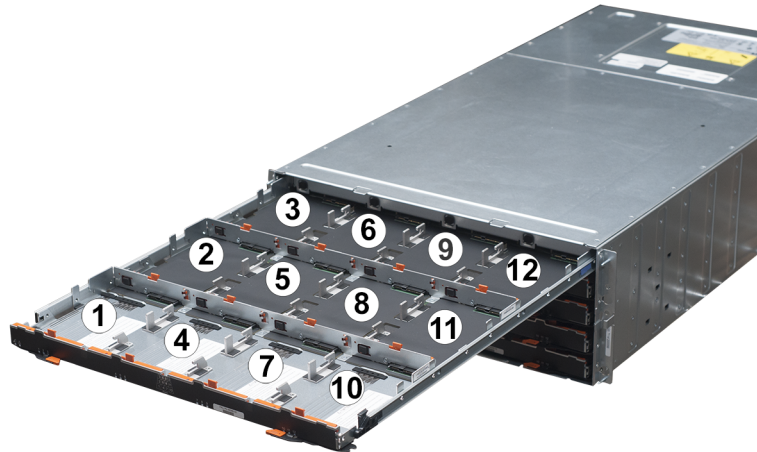

About the NetBackup 5330 Appliance Primary Storage Shelf and Expansion Storage Shelf rear panels

The NetBackup 5330 Appliance Primary Storage Shelf and the Expansion Storage Shelf includes two power cords that should be plugged into the appropriate external power source within a rack. When connecting power cables, wear an ESD-preventive wrist strap to prevent equipment damage.


The rear panel of both disk systems contains three types of canisters:

- RAID or Expansion canisters
- AC power canisters (220VAC)
- Fan canisters

The Primary Storage Shelf has two RAID canisters, which are inserted in the central slots of the back panel. The power supplies are inserted at the top and bottom of the back panel, and the fans are on either side. The RAID canisters are attached to the NetBackup 5330 Appliance with fiber optic cables. The device must have at least one functioning RAID canister, one functioning power supply, and one functioning fan.

The following figure shows the Primary Storage Shelf rear panel.

Figure 1-10 Primary Storage Shelf rear panel

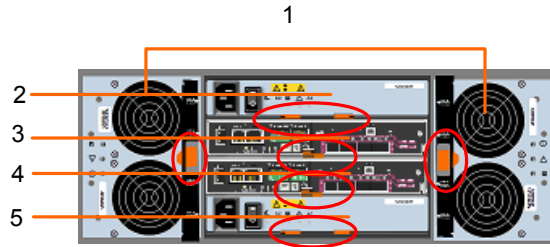

Note: Latches that let you remove the canisters are circled in red.

Table 1-9 Primary Storage Shelf rear panel components

Number	Description
1	Fan canisters
2 and 5	Power canisters
3 and 4	RAID controller canisters

Each RAID canister has a set of LEDs which are defined in the following figure. The table describes the LEDs functions and colors. The LEDs labeled '1' track the data rate of the link. If both are off, the link is inactive, and if both are on, the data rate is 8 Gb per second. If only one LED is on, the LED on the left indicates a 2 Gb/s data rate, and the one on the right indicates a 4 Gb/s data rate. The canister also displays the ID of the Primary Storage Shelf, which is set to '99'.

Figure 1-11 RAID canister LEDs

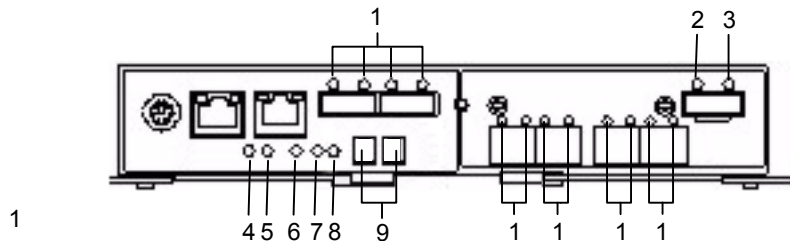


Table 1-10 RAID canister LEDs

Number	Description	Color
1	Data link activity	Green
2	SAS expansion fault	Amber
3	SAS expansion active	Green
4	Battery service action required	Amber
5	Battery charging	Green
6	RAID service system action allowed	Blue
7	RAID service system action required	Amber
8	Cache active	Green
9	Seven-segment display LEDs for system ID	Displays '99'

The Expansion Storage Shelf also contains two fans, on either side, and two power supplies, in the top and the bottom slots. The power supplies should be connected to the Power Distribution Units (PDU), which must be connected to an external 240V power supply. The two center slots contain expansion canisters, one of which must always function. The Expansion Storage Shelf must be attached to a Primary Storage Shelf by SAS cables, plugged into the expansion canisters.

Figure 1-12 Expansion Storage Shelf rear panel

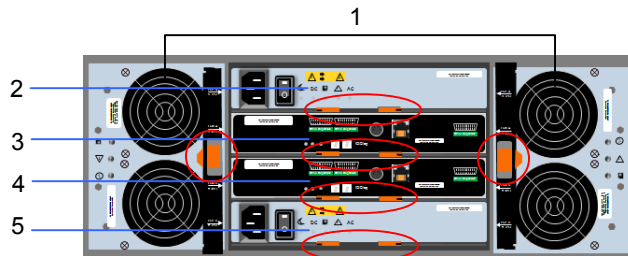


Table 1-11 Expansion Storage Shelf rear panel components

Number	Description
1	Fan canisters
2 and 5	Power canisters
3 and 4	Expansion canisters

The following diagram shows the LEDs in the Expansion Storage Shelf canister, along with the SAS ports. It also gives the location of the tray ID that is displayed when the system is initialized. The Primary Storage Shelf recognizes the Expansion Storage Shelf where the ID is set to 00.

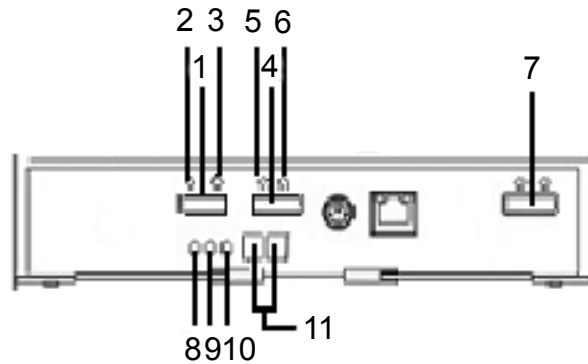


Table 1-12 Expansion Storage Shelf rear panel features


Number	Description	LED Display
1	SAS port	n/a
2	Link fault LED	Amber
3	Data Link LED	Green
4	SAS port	n/a
5	Link fault LED	Amber
6	Data Link LED	Green
7	SAS port	n/a
8	Service action allowed LED	Blue
9	Service action required LED	Amber

Table 1-12 Expansion Storage Shelf rear panel features (*continued*)

Number	Description	LED Display
10	Power LED	Green
11	Seven-segment display LEDs for system ID	00

As seen in both diagrams, the seven-segment display LEDs shows the storage system ID, once the devices have been turned on and are recognized. The following diagram shows the location of these displays, as seen on the rear panel of the Primary Storage Shelf, which are circled in red.

Figure 1-13 Primary Storage Shelf LED location

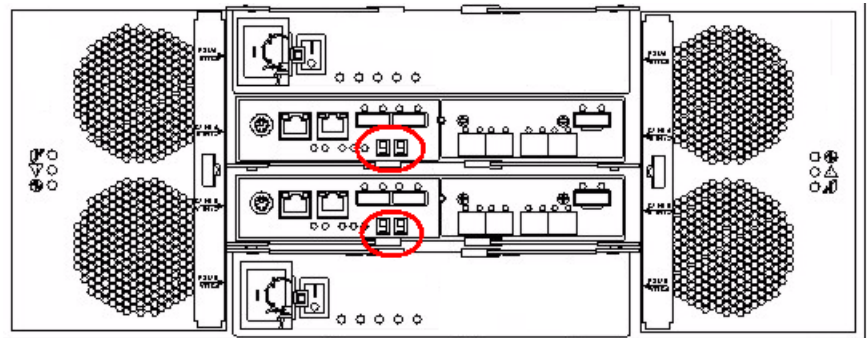

IMPORTANT: Notice that both systems have identical power supply canisters and fan canisters. However, the Primary Storage Shelf contains RAID controller canisters. The Extension Storage Shelf contains expansion canisters instead of RAID canisters. The following figure provides a comparison of the two canister types.

Figure 1-14 Comparison of the Primary Storage Shelf and Extension Storage Shelf - rear view

Primary Storage Shelf



Expansion Storage Shelf


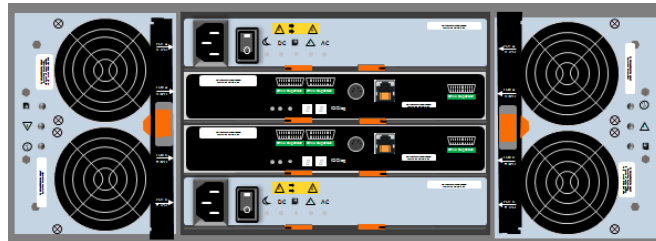


Figure 1-15 Comparison of the Primary Storage Shelf and Extension Storage Shelf canisters

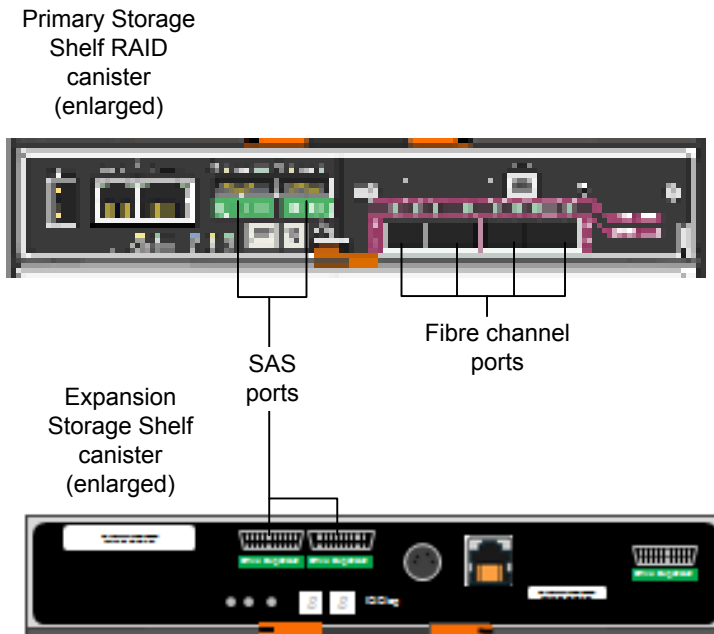

Best practices for rack installation

The heaviest equipment should be installed at the bottom of a rack. The heavy devices that are installed at the top of a rack make the rack "top-heavy", or unstable. Unstable racks jeopardize staff and equipment safety and are subject to risk.

When you install more than one device per rack, do the following:

- Find out how much each device weighs.

Note: A storage device is heavier than an appliance and must always be installed under the appliance.

- Determine device order and cabling limits.
- Be aware of the depth of the guide rails and the devices. Ensure that the distance between cabinet posts accommodates the rails and devices.
 - The rack rails that are provided for the storage shelf are extensible to 36" (914mm). This distance is the maximum depth that is allowed between rack

posts. If the distance between rack posts is longer than 36" (914mm) the rails and the appliance cannot be properly installed. The width of the storage shelf is 19" (482.6mm).

If your rack dimensions do not conform to these requirements contact technical support.

NetBackup 5330 Appliance cables

This chapter includes the following topics:

- [Power cables](#)
- [Network cable](#)
- [Multi-Mode fiber optic cable](#)

Power cables

The AC power modules of the appliance and the storage shelves accept one AC power cable. One end of the AC power cable is connected to the power supply on the appliance or the storage device. The other end of the cable is connected to an external Power Distribution Unit (PDU) on the rack.

A power cable includes live line, neutral line, and grounding lines.

Figure 2-1 AC power cable

- A AC power connector (IEC-60320-C14) to an external Power Supply Distribution Unit (PDU) on a rack.
- B AC power connector (IEC-60320-C13) to an appliance or a storage device.


Note: If your power distribution unit is not compatible with the IEC-60320-C13 plug, then Veritas recommends that you purchase your power cable locally. Make sure the power cable meets or exceeds the indicated power rating.

See [“NetBackup 5330 Appliance system technical specifications”](#) on page 36.

Network cable

The NetBackup Appliance communicates with data networks through an Ethernet network cable. One end of the network cable connects to the management network port or service network port of the appliance. The other end of the cable connects to the network switch or an external gateway. Both ends of the cable use RJ45 connectors.


Figure 2-2 Network cable

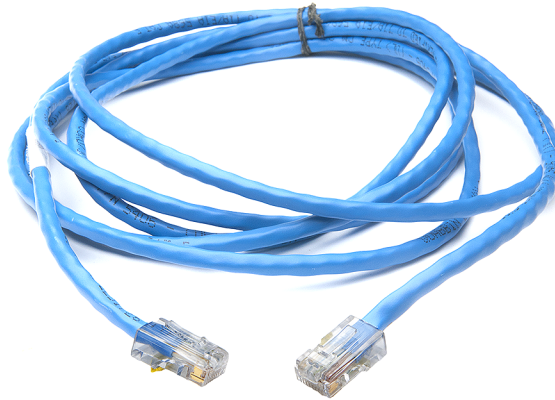


Multi-Mode fiber optic cable

The NetBackup Appliance communicates with the Fibre Channel switch through a multi-mode fiber optic cable. One end of the multi-mode fiber optic cable connects to the 10GE service network port or the Fibre Channel port. The other end of the cable connects to the Fibre Channel switch or other devices. The two ends of the multi-mode fiber optic cable are LC connectors.

Figure 2-3 Multi-Mode fiber optic cable

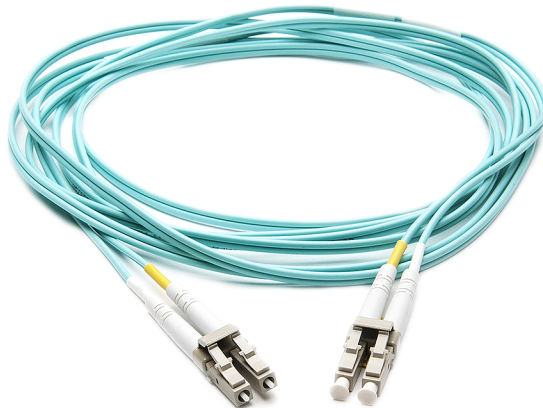

Fiber optic cables require Small Form-factor Pluggable (SFP+) transceivers, which are provided with each device having Fibre Channel ports. The diagram shows the SFP, labeled 1, and the fiber optic cable which is attached to it, labeled 2.

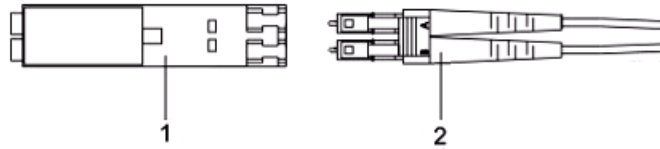

Supported SFPs are listed:

- Finisar
- JDSU

Technical specifications, standards, and compliance information

This appendix includes the following topics:

- [NetBackup 5330 Appliance system technical specifications](#)
- [Environmental specifications](#)
- [Protocol standards](#)
- [Regulatory, compliance, and certification information](#)

NetBackup 5330 Appliance system technical specifications

Table A-1 NetBackup 5330 Appliance specifications

Parameter	Description
Rack information	19" EIA compliant The rack installation height is the space occupied by an appliance in a rack cabinet. The rack height for the appliance is 2U (1U = 44.5 cm). Install the appliance in a rack cabinet that is 19 inches (1 inch = 2.54 cm) wide and 39.37 inches (100 cm) deep.

Table A-1 NetBackup 5330 Appliance specifications (*continued*)

Parameter	Description
Weight	<p>Approximately 30 kg (66 lbs)</p> <p>Note: The maximum weight of the NetBackup 5330 Appliance includes the eight disk drive modules, eight disk drive carriers, and two power modules.</p> <p>Note: When shipping the appliance, the total weight of the system equals the sum of the maximum weight of a device and the maximum weight of the transportation materials.</p>
Performance	<p>Processors</p> <ul style="list-style-type: none"> ■ Two Intel Xeon 10 core 2.80GHz E5-2680 v2 CPUs or Two Intel Xeon 10 core 3.00GHz E5-2690 v2 CPUs ■ Supports the high-performance processors with low-power consumption. ■ Provides high-capacity intra-appliance switching bandwidth, along with high I/O throughput. ■ Available storage capacity can be any combination of up to 229 TB. The available capacity can be allocated either in part or in whole to a deduplication pool or to an AdvancedDisk pool (non-deduplicated storage).
Dimensions	<p>Height: 8.76 cm (3.45") (approximately 2U)</p> <p>Width: 43.8 cm (17.24")</p> <p>Depth: 69.59 cm (27.39")</p>
Power consumption	<p>750 watts maximum</p>
AC power requirements	<p>110 VAC or 220 VAC</p> <p>100 - 110 VAC at 50/60 Hz 8.2 A</p> <p>200 - 220 VAC at 50/60 Hz 4.4 A</p>

Table A-1 NetBackup 5330 Appliance specifications (*continued*)

Parameter	Description
AC power cable	<p>Specification: IEC-60320-C14 to IEC-60320-C13, 10A/250V, Black, 4 ft</p> <p>The IEC-60320-C14 plugs into a Power Distribution Unit. The IEC-60320-C13 plugs into an appliance or storage shelf power supply.</p> <p>Note: If your power distribution unit is not compatible with the IEC-60320-C14 plug, then Veritas recommends that you purchase your power cable locally. Make sure the power cable meets or exceed the indicated power rating.</p> <p>See “Power cables” on page 32.</p>
Inherent availability of the system	≥ 99.95%
Operating temperature	+10°C to +35°C with the maximum rate of change not to exceed 10°C per hour
Non-operating temperature	-40°C to +70°C
Non-operating humidity	90%, non-condensing at 35°C
Acoustic noise	<p>Sound power: 7.0 dB in operating condition at typical office ambient temperature.</p> <p>(23°C +/- 2)</p>
System Cooling Requirement	<p>460 watts maximum – 1570 BTU/hour</p> <p>750 watts maximum – 2559 BTU/hour</p>

The technical specifications for the NetBackup 5330 Appliance Primary Storage Shelf and for the NetBackup 5330 Appliance Expansion Storage Shelf are as follows.

Table A-2 Primary Storage Shelf and Expansion Storage Shelf technical specifications

Parameter	Description
Rack information	4U

Table A-2 Primary Storage Shelf and Expansion Storage Shelf technical specifications (*continued*)

Parameter	Description
Weight	<p>Approximately 105.2 kg (232 lb) with the 60 disk drives installed</p> <p>Approximately 80 kg (176 lb) without the disk drives</p> <p>Note: The maximum weight of the storage shelves includes 60 disk drive slots, two power canisters, and two fan canisters.</p>
Dimensions	<p>Length: 82.55 cm (32.50")</p> <p>Width: 48.28 cm (19.00")</p> <p>Height: 17.78 cm (7.00") (approximately 4U)</p>
Overall maximum AC currents (agency ratings)	<p>7.56 A at 200 VAC</p> <p>6.3 A at 240 VAC</p>
AC power requirements	<p>Input voltage: 200 - 240 VAC</p> <p>Frequency: Range 50 Hz to 60 Hz</p> <p>Typical operating current: Range 4.9 A to 5.75 A</p> <p>Nameplate rating: Range 6.3 A to 7.56 A</p>
Primary Storage Shelf Power ratings and heat dissipation including two fan canisters, two power canisters, 60 disk drives, and two RAID canisters.	<p>1135 watts (typical)</p> <p>1222 watts (maximum)</p> <p>Cooling BTU/hour: 3873 (typical)</p> <p>Cooling BTU/hour: 4180 (maximum)</p>
Expansion Storage Shelf Power ratings and heat dissipation including two fan canisters, two power canisters, 60 disk drives, and two expansion canisters.	<p>847 watts (typical)</p> <p>1222 watts (maximum)</p> <p>Cooling BTU/hour: 2890 (typical)</p> <p>Cooling BTU/hour: 4180 (maximum)</p>
NetBackup 5330 Appliance compute node with a Primary Storage Shelf connected	<p>1595 watts (typical)</p> <p>1972 watts (maximum)</p> <p>Cooling BTU/hour: 5442 (typical)</p> <p>Cooling BTU/hour: 6739 (maximum)</p>

Table A-2 Primary Storage Shelf and Expansion Storage Shelf technical specifications (*continued*)

Parameter	Description
NetBackup 5330 Appliance compute node with both a Primary Storage Shelf and an Expansion Storage Shelf connected	2442 watts (typical) 3194 watts (maximum) Cooling BTU/hour: 8332 (typical) Cooling BTU/hour: 10919 (maximum)
Sound levels	Sound power (standby operation): 6.5 bels Sound power (normal operation): 6.8 bels Sound pressure: 68 dB

Environmental specifications

The following table lists the requirements for the NetBackup 5330 Appliance and the storage shelves.

Table A-3 Environmental specifications

Component	Requirement
Operating temperature	10°C to 35°C (50°F to 95°F)
Storage temperature	-40°C to 70°C (-40°F to 158°F)
Transportation temperature	-40°C to 70°C (-40°F to 158°F)
Temperature gradient	10°C/h
Operating humidity	10%RH to 85%RH
Operating altitude	-30 meters to 3,000 meters In altitudes from -60 meters to +1,800 meters, the ambient temperature ranges from 5°C to 35°C. When the altitude ranges from 1,800 meters to 3,000 meters, the environment temperature decreases by 0.6°C when the altitude increases by 100 meters.
Storage altitude	-30 meters to 3,000 meters

Table A-3 Environmental specifications (*continued*)

Component	Requirement
Noise	<p>< 72 A-weighted decibel</p> <p>This value reflects the maximum noise of the appliance when the ambient temperature is 25°C.</p>

Protocol standards

The following table provides standards with which the NetBackup 5330 Appliance and storage shelves comply.

Table A-4 Standards compliance

Standard	Version
IPMI 2.0	Intelligent Platform Management Interface Specification Second Generation v2.0, Document Revision 1.0
SMBIOS	System Management BIOS (SMBIOS) Reference Specification, Version 2.5
SAS	SAS- 2.1
ACPI	Advanced Configuration and Power Interface (ACPI) specification, Revision 3.0
IP	RFC0791: Internet Protocol
FC	INCITS T11 (X3T9.3)
PCI Express	PCIe 3.0

Regulatory, compliance, and certification information

Refer to the *NetBackup Appliance Safety and Maintenance Guide*, which you can find on the [NetBackup Appliance Documentation](#) page.

Index

A

- appliance
 - control panel descriptions 13
 - disk drive LED descriptions 13
 - Fibre Channel HBA support 9
 - fibre channel host bus adapter 20
 - front panel
 - LED descriptions 12
 - performance 8, 37
 - Primary and Expansion Storage Shelf storage capacities 8
 - RAID cache specification 8
 - RAID specifications 9
 - rear panel 14
 - rear panel port components 9
 - rear panel port functions 15
 - rear panel ports and features 14
 - rear port color assignments 16
 - system features 9
 - system memory configuration 8
- appliance compute node
 - disk drive layout 11
 - PCIe options 16
 - slot assignments and RAID disk assignments 11

C

- cables
 - multi-mode fiber optic 34
 - network 33
 - power 32

D

- disk drive layout
 - appliance compute node 11

E

- Ethernet card
 - dual-port 10GB card specifications 19
- Ethernet port configurations 18

- Expansion Storage Shelf
 - about 21
 - drawer disk layout 24
 - expansion canisters 27
 - fan canisters 27
 - front panel descriptions 22
 - front panel LED definitions 23
 - power canisters 27
 - rear panel components 27
 - rear panel features 28

F

- fibre channel host bus adapter 20

N

- NetBackup 5330 Appliance technical specifications 36

P

- PCIe options 16
- PCIe slot configurations 16
- Primary Storage Shelf
 - about 21
 - disk drive layout 22
 - drawer disk layout 24
 - fan canisters 25
 - front panel descriptions 22
 - front panel LED definitions 23
 - power canisters 25
 - RAID controller canister LED descriptions 25
 - RAID controller canisters 25
 - rear panel components 25
- Primary Storage Shelf and Expansion Storage Shelf comparison 29
- Primary Storage Shelf and Expansion Storage Shelf technical specifications 40

R

- rack installation
 - best practices 30

- RAID disk assignments
 - appliance compute node 11
- regulatory, compliance, and certification information 41

S

- slot assignments
 - appliance compute node 11
- specifications
 - environmental 40
- standards
 - protocol 41
- storage shelf drawer disk layout 24
- system features 9